







MRK.	DATE	REVISION	SIGN
------	------	----------	------

SPECIFICATION


1. Rating : 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
2. Contact Resistance : 80mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50Pcs Tube

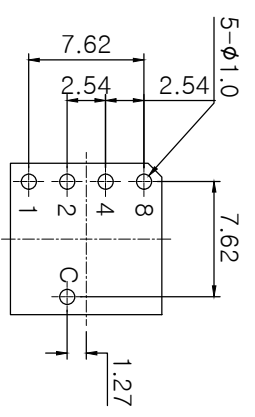

P.C.B DIMENSION (Top View)

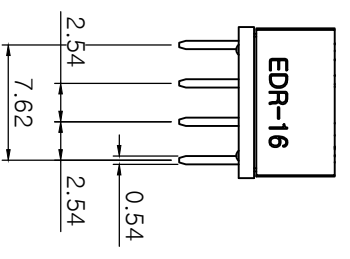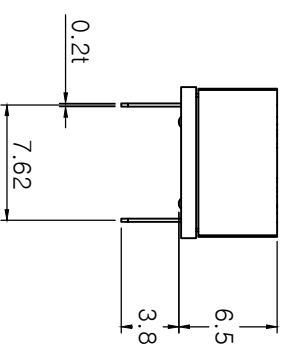

Real Code		C	1	2	4	8
0	●					0
1	●		●			1
2	●			●		2
3	●				●	3
4	●					4
5	●		●			5
6	●			●		6
7	●				●	7
8	●					8
9	●		●			9
10	●				●	A
11	●			●		B
12	●				●	C
13	●		●			D
14	●			●		E
15	●				●	F



DRAW/DESIGNED	CHECKED	APPRO/VD	UNIT	SCALE	MODE	ROTARY DIP SWITCH
---------------	---------	----------	------	-------	------	-------------------

JS YANG	WJ LEE	KJ LEE	mm	2:1	NO	EDR-16
---------	--------	--------	----	-----	----	--------

2022-01-07	2022-01-07	2022-01-07	SIZE	APP. NO.	EDR-16-03	REV.
			A4			03