
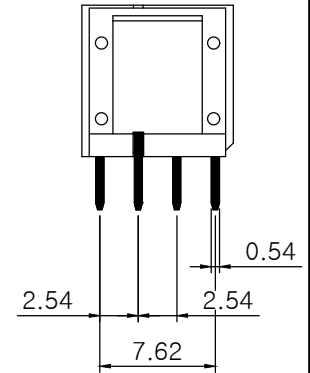
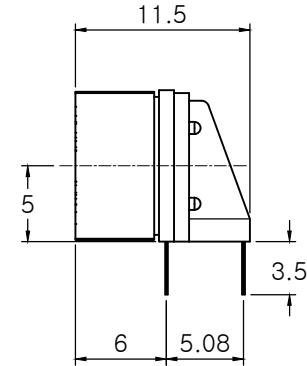






MRK.	DATE	REVISION	SIGN

SPECIFICATION

- Rating : 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min at DC 250V
- Operating Force : 700gf Max
- Life cycle : 10,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 50pcs Tube



16 P o s i t i o n	Real Code					0
	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●	●		6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9
10	●		●		●	A
11	●	●	●		●	B
12	●			●	●	C
13	●	●		●	●	D
14	●		●	●	●	E
15	●	●	●	●	●	F

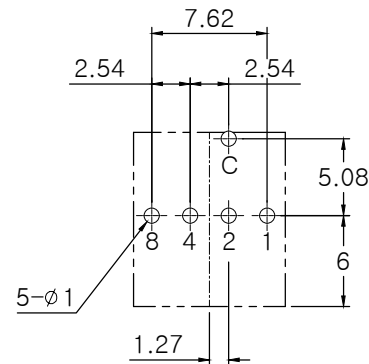

DRAW/DESIGNED	CHECKED	APPROVED	G.TOL	TITLE	ROTARY DIP SWITCH
J.S YANG	W.J LEE	K.I LEE	0.3	EDR-16H	
2022-01-07	2022-01-07	2022-01-07	UNIT	MODEL	REV.
邦斯达 BONSDA Electronics 深圳市子庚科技有限公司			mm	NO.	03
			SIZE	DRAW	
			A4	NO.	

