





| | | | |
|------|------|----------|------|
| MRK. | DATE | REVISION | SIGN |
|------|------|----------|------|

SPECIFICATION



- Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min at DC 250V
- Operating Force : 700gf Max
- Life cycle : 10,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 50pcs Tube / 2000pcs Reel Packing

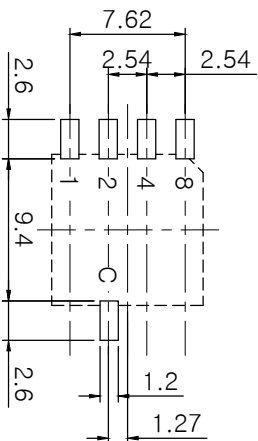


P.C.B DIMENSION (Top View)



ACTUATOR

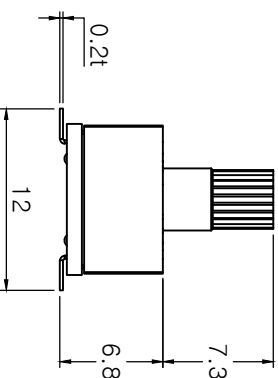

| 16 Positions | Reel Code | | | | | | | |
|--------------|-----------|---|---|---|---|---|---|---|
| | C | 1 | 2 | 4 | 8 | | | |
| 0 | ● | | | | | | | |
| 1 | ● | ● | | | | | | |
| 2 | ● | | ● | | | | | |
| 3 | ● | | | ● | | | | |
| 4 | ● | | | | ● | | | |
| 5 | ● | | | | | ● | | |
| 6 | ● | | | ● | | | | |
| 7 | ● | | | | | ● | | |
| 8 | ● | | | | | | ● | |
| 9 | ● | | | | | | | ● |
| 10 | ● | | | ● | | | | |
| 11 | ● | | | | ● | | | |
| 12 | ● | | | | | ● | | |
| 13 | ● | | | | | | ● | |
| 14 | ● | | | ● | | | | |
| 15 | ● | | | | | | | ● |



| | | | | | | |
|---------------|---------|----------|-------|--|-------------------|--|
| DRAW/DESIGNED | CHECKED | APPROVED | G.TOL | | ROTARY DIP SWITCH | |
|---------------|---------|----------|-------|--|-------------------|--|

| | | | | | | |
|----------|---------|---------|-----|-------|------|------|
| J.S YANG | W.J LEE | K.I LEE | UNI | SCALE | MODE | REV. |
|----------|---------|---------|-----|-------|------|------|

| | | | | | | |
|------------|------------|------------|----|-----|-----|----|
| 2022-01-07 | 2022-01-07 | 2022-01-07 | mm | 2:1 | NO. | 03 |
|------------|------------|------------|----|-----|-----|----|

邦斯达 BONSUDA 深圳市子庚科技有限公司